## STARTER TRUCK TOYOTA GB

1/72 SCALE





From 1938 until the end of World War II, the Japanese Air Force extensively used the Toyota GB Starter Truck.

Originally adapted from a standard cargo truck, the starter unit consisted of a power take-off from the transmission, a right-angle gear drive and a moveable boom which could be adjusted to mesh with the propeller hub of a fighter plane. This design, besides being economical, was highly efficient since when not used as a starting unit, the truck was available for general utility work.

If you wish to present your model of the starter truck as one manufactured during the latter part of the war, you should leave off the front fenders, the radiator grill and one headlight, because as shortages becan more prevalent during the latter part of the war, these "unnecessary" details were omitted from production.


HASEGAWA SEISAKUSHO CO.,LTD

1193-2 Yagusu, Yaizu 425, Shizuoka, Japan


## BEFORE ASSEMBLING YOUR KIT

Read these instructions carefully before assembling your model and check the exact fit of the parts before cementing. Clean off excess plastic, if any, with a sharp knife or a file. Since many tiny parts are included, check them with the assembly drawing before assembling. Do not tear off parts from the stem, but cut them off carefully with a knife or clippers. Do not cut off all of the parts at the beginning, but cut each part to be assembled, one by one, to assure each part being properly identified. Do not use too much cement since surplus adhesive can spoil the finish.


Cement two 7's to 45 as shown then cement two 6's to 40. Cement 45 to 40.

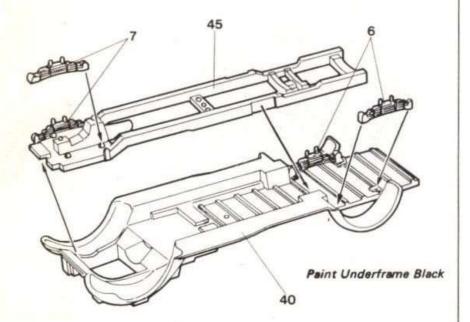


2 Cement two 2's to 28 then cement 28 to springs on chassis front. Cement two 3's to 29 then cement unit to chassis as shown.

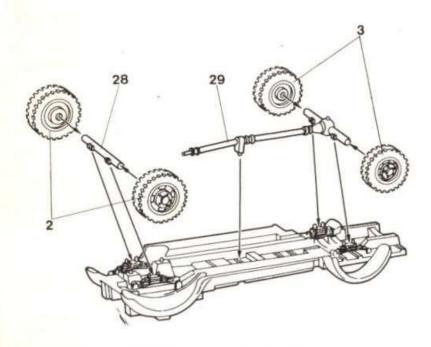



Cement 41 and 43 to floorboard as shown. Cement 38 and 39 to chassis front, Cement 48 to 49 then cement 49 to 38 and 39. Cement 44 to steering column 43. Cement 50 to floor.

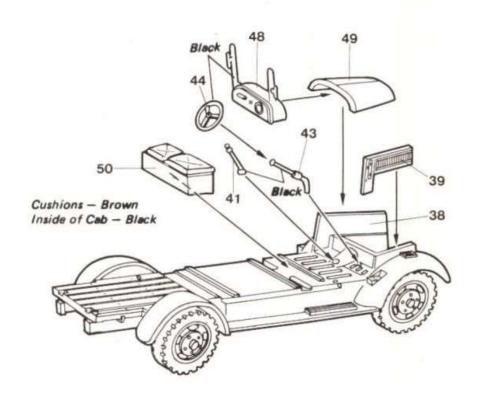


Cement 18 and 19 to 20 then cement figure to seat. Cement 11 to chassis and windshield frames. Cement 37 behind driver's seat as shown. Cement 34 and 35 to sides and cement 36 to rear of chassis.

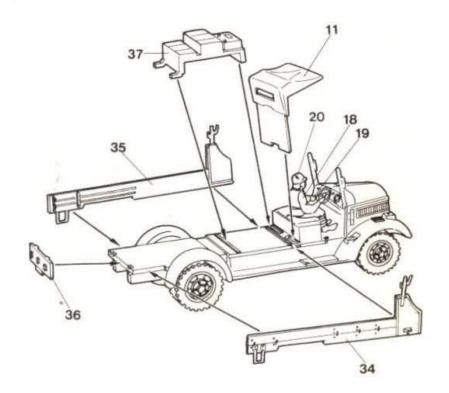


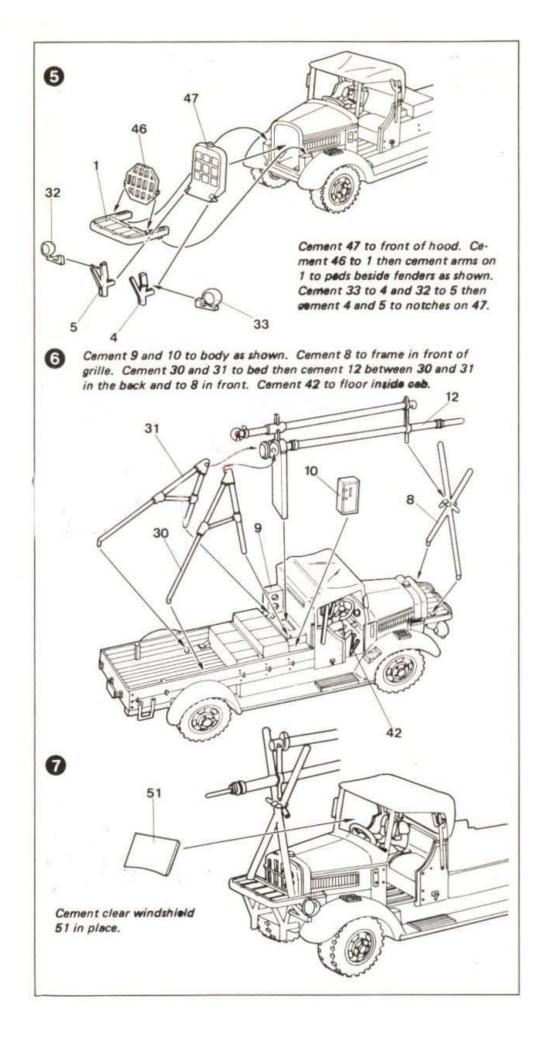


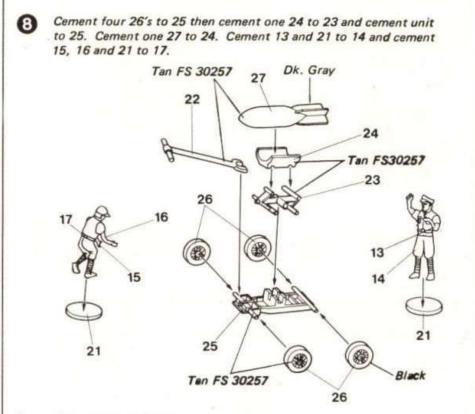

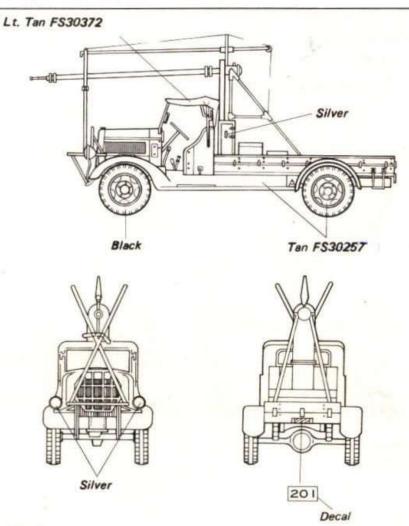

## PART DRAWINGS AND PART NUMBERS

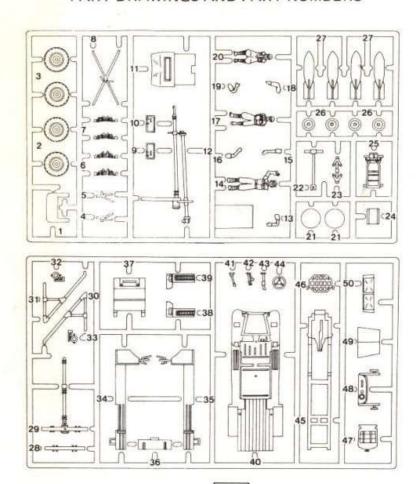



51